

Cim 30VACR



This article was made in compliance with the quality management requirements of standard ISO 9001:2008. All articles are tested according to the standard EN 12266-1:2003.

It is used in a wide variety of sectors for non-return piping systems: drinking water distribution networks, heating and air conditioning, sanitary systems, saturated steam and generally with any non corrosive liquid.


It is guaranteed for 5 years.

It is made of a brass alloy that complies with standard EN 12165-CW602N-M.

Nominal Pressure: PN 4

Operating temperature: 150°C


FLOW AND PRESSURE DROP

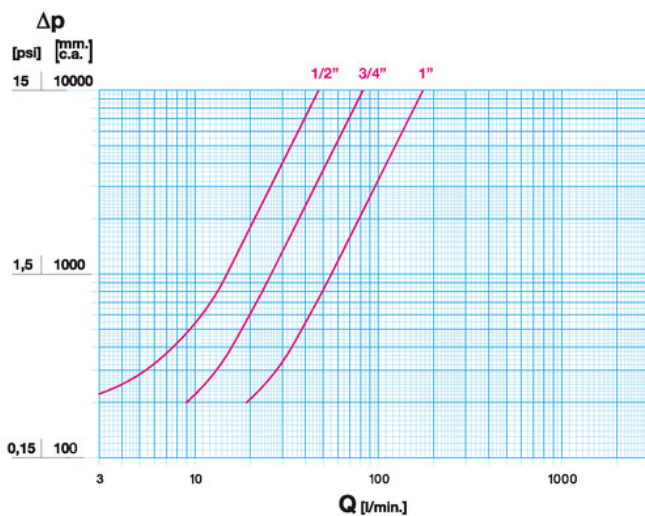

Notes:

- 1 l/min = 0,06 m³/h
- 1 m³/h = 16,67 l/min
- 1 bar = 10.000 mm w.c.
- 1 psi = 690 mm w.c.


PRESSURE TEMPERATURE RATINGS

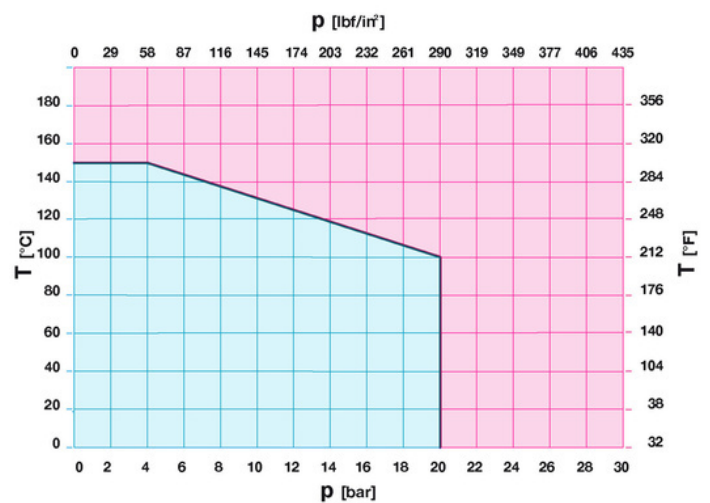

Notes:

- 1 bar = 14,5 psi
- 1 bar = 14,5 lbf/in²
- °C = 5/9 x (°F-32)
- °F = 32 + (9/5 x °C)

TECHNICAL DRAWING

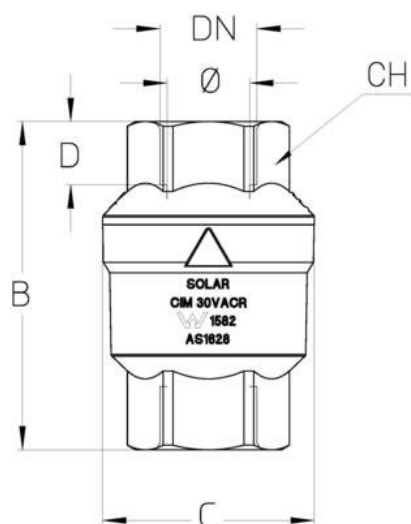

DN	1/2"	3/4"	1"
Φ mm	17,9	24	30
Grms.	185	275	455
B	63,5	70	80
C	38	45	52,5
D	15	16	19
CH	21	31	39

Thread:
ISO 228

Upon request:
ANSI B.1.20.1 - NPT

TECHNICAL CHARACTERISTICS

KV			
DN	1/2"	3/4"	1"
KV	3,7	7	13

KV = Flow rate in m³/h with a pressure drop of 1 bar

OUR CERTIFICATIONS

